

## OUTLINE

The RN5RYxx1 Series are CMOS-based VFM Control ICs for step-up DC/DC converter with an external driver transistor featuring high output voltage accuracy and low supply current. Each of the RN5RYxx1 Series ICs consists of a voltage reference unit, an error amplifier, an oscillator, a VFM control circuit and feed back resistors. A low ripple, high efficiency step-up DC/DC converter can be composed of the RN5RYxx1 Series with only an inductor, a diode, a capacitor, and a drive transistor.

Since the package for these ICs is SOT-23-5( Mini-mold)package, high density mounting of the ICs on boards is possible.


## FEATURES

- Low Supply Current .....Typ. 3 $\mu$ A
- Low Standby Current .....Typ. 0.6 $\mu$ A
- Low Temperature-Drift Coefficient of Output Voltage .....Typ.  $\pm$ 50ppm /  $^{\circ}$ C
- High Accuracy Output Voltage ..... $\pm$ 2.5%
- Low Oscillation Start-up Voltage .....Max. 0.8V
- Small Package .....SOT-23-5(Mini-Mold)

## APPLICATIONS

- Power source for battery-powered instruments.
- Power source for cameras, VCRs, camcorders, pagers, and other hand-held communication instruments.

## BLOCK DIAGRAM

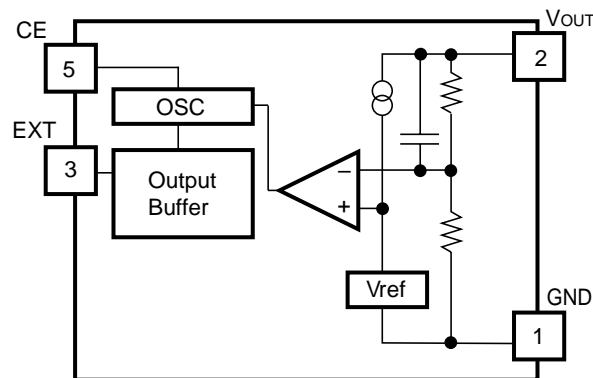

## SELECTION GUIDE

In the RN5RYxx1 Series, the output voltage, the version and the taping type for the ICs can be selected at the user's request. The selection can be made by designating the part number as shown below :


RN5RY $\overline{\text{xxxx}}$  -  $\overline{\text{xx}}$  ← Part Number  
 $\overline{\uparrow\uparrow\uparrow}$     $\overline{\uparrow}$   
 a bc   d

Code	Contents
a	Designation of Output Voltage (V <sub>OUT</sub> ) V <sub>OUT</sub> can be designated within the range of 2.0 to 6.0V
b	1
c	Designation of Packing Type: A: Taping C: Antistatic bag for samples
d	Designation of Taping Type: Ex. SOT-23-5: TR, TL (refer to Taping Specification) "TR" is prescribed as a standard

For example, the product with Output Voltage 2.0V, Taping Type TR, is designated by Part Number RN5RY201A-TR.

Discontinued Product

## PIN CONFIGURATION

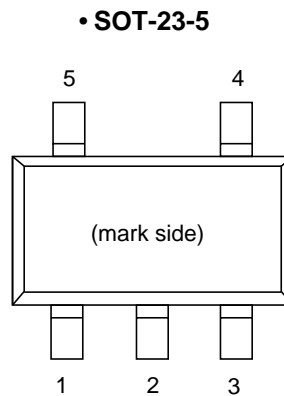

## PIN DESCRIPTION

Pin No.	Symbol	Description
1	GND	Ground Pin
2	VOUT	Output Pin
3	EXT	External Transistor Drive Pin (CMOS Output)
4	NC	No Connection
5	CE	Chip Enable Pin

Discontinued Product

## ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Ratings	Unit
$V_{IN}$	Input Voltage	+12	V
$V_{CE}$	CE Pin Input Voltage	-0.3 to $V_{OUT}+0.3$	V
$V_{EXT}$	EXT Pin Output Voltage	-0.3 to $V_{OUT}+0.3$	V
$I_{EXT}$	EXT Pin Output Current	$\pm 50$	mA
$P_D$	Power Dissipation	150	mW
$T_{opt}$	Operating Temperature	-30 to +85	$^{\circ}C$
$T_{stg}$	Storage temperature	-55 to +125	$^{\circ}C$
$T_{solder}$	Lead Temperature (Soldering)	260 $^{\circ}C$ , 10s	

### ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

Discontinued Product

## ELECTRICAL CHARACTERISTICS

## • RN5RY301

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =1.5V, I <sub>OUT</sub> =10mA	2.925	3.000	3.075	V
V <sub>IN</sub>	Input Voltage				10	V
I <sub>DD1</sub>	Supply Current 1	EXT No load, V <sub>OUT</sub> =3.15V, Test circuits1		3	5	μA
I <sub>DD2</sub>	Supply Current 2	EXT No load, V <sub>OUT</sub> =2.85V, Test circuits1		25	50	μA
I <sub>standby</sub>	Standby Current	V <sub>OUT</sub> =1.5V, Test circuits2		0.6	1.5	μA
f <sub>osc</sub>	Maximum Oscillator Frequency	V <sub>OUT</sub> =2.85V, Test circuits3		180		kHz
Duty	Oscillator Duty Cycle	V <sub>OUT</sub> =2.85V, EXT High side, Test circuits3	60	75		%
V <sub>start</sub>	Oscillator Start-Up Voltage	EXT No load, Test circuits4		0.7	0.8	V
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I <sub>OUT</sub> =10mA -30°C ≤ T <sub>opt</sub> ≤ 85°C		±50		ppm/°C
I <sub>EXTH</sub>	EXT "H" Output Current	V <sub>OUT</sub> =2.85V, V <sub>EXT</sub> =GND, Test circuits5			-1.5	mA
I <sub>EXTL</sub>	EXT "L" Output Current	V <sub>OUT</sub> =2.85V, V <sub>EXT</sub> =2.85V, Test circuits6	1.5			mA
V <sub>CEH</sub>	CE "H" Input Voltage	V <sub>OUT</sub> =2.85V, Test circuits4	1.5			V
V <sub>CEL</sub>	CE "L" Input Voltage	V <sub>OUT</sub> =2.85V, Test circuits4			0.25	V
I <sub>CEH</sub>	CE "H" Input Current	CE=3.0V, Test circuits7		0.0	0.1	μA
I <sub>CEL</sub>	CE "L" Input Current	CE=GND, Test circuits8	-0.1	0.0		μA

**RN5RYxx1**
**• RN5RY401**
 $T_{opt}=25^{\circ}\text{C}$ 


Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
$V_{OUT}$	Output Voltage	$V_{IN}=2.0\text{V}$ , $I_{OUT}=10\text{mA}$	3.900	4.000	4.100	V
$V_{IN}$	Input Voltage				10	V
$I_{DD1}$	Supply Current 1	EXT No load, $V_{OUT}=4.2\text{V}$ , Test circuits1		3	5	$\mu\text{A}$
$I_{DD2}$	Supply Current 2	EXT No load, $V_{OUT}=3.8\text{V}$ , Test circuits1		50	90	$\mu\text{A}$
Istandby	Standby Current	$V_{OUT}=2.0\text{V}$ , Test circuits2		0.6	1.5	$\mu\text{A}$
fosc	Maximum Oscillator Frequency	$V_{OUT}=3.8\text{V}$ , Test circuits3		180		kHz
Duty	Oscillator Duty Cycle	$V_{OUT}=3.8\text{V}$ , EXT High side, Test circuits3	60	75		%
Vstart	Oscillator Start-Up Voltage	EXT No load, Test circuits4		0.7	0.8	V
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	$I_{OUT}=10\text{mA}$ $-30^{\circ}\text{C}\leq T_{opt}\leq 85^{\circ}\text{C}$		$\pm 50$		ppm/ $^{\circ}\text{C}$
$I_{EXTH}$	EXT "H" Output Current	$V_{OUT}=3.8\text{V}$ , $V_{EXT}=\text{GND}$ , Test circuits5			-1.5	mA
$I_{EXTL}$	EXT "L" Output Current	$V_{OUT}=3.8\text{V}$ , $V_{EXT}=3.8\text{V}$ , Test circuits6	1.5			mA
$V_{CEH}$	CE "H" Input Voltage	$V_{OUT}=3.8\text{V}$ , Test circuits4	1.5			V
$V_{CEL}$	CE "L" Input Voltage	$V_{OUT}=3.8\text{V}$ , Test circuits4			0.25	V
$I_{CEH}$	CE "H" Input Current	$\text{CE}=4.0\text{V}$ , Test circuits7		0.0	0.1	$\mu\text{A}$
$I_{CEL}$	CE "L" Input Current	$\text{CE}=\text{GND}$ , Test circuits8	-0.1	0.0		$\mu\text{A}$

## • RN5RY501


T<sub>opt</sub>=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =2.5V, I <sub>OUT</sub> =10mA	4.875	5.000	5.125	V
V <sub>IN</sub>	Input Voltage				10	V
I <sub>DD1</sub>	Supply Current 1	EXT No load, V <sub>OUT</sub> =5.25V, Test circuits1		3	5	μA
I <sub>DD2</sub>	Supply Current 2	EXT No load, V <sub>OUT</sub> =4.75V, Test circuits1		90	150	μA
I <sub>standby</sub>	Standby Current	V <sub>OUT</sub> =2.5V, Test circuits2		0.6	1.5	μA
f <sub>osc</sub>	Maximum Oscillator Frequency	V <sub>OUT</sub> =4.75V, Test circuits3		180		kHz
Duty	Oscillator Duty Cycle	V <sub>OUT</sub> =4.75V, EXT High side, Test circuits3	60	75		%
V <sub>start</sub>	Oscillator Start-Up Voltage	EXT No load, Test circuits4		0.7	0.8	V
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I <sub>OUT</sub> =10mA -30°C ≤ T <sub>opt</sub> ≤ 85°C		±50		ppm/°C
I <sub>EXTH</sub>	EXT "H" Output Current	V <sub>OUT</sub> =4.75V, V <sub>EXT</sub> =GND, Test circuits5			-1.5	mA
I <sub>EXTL</sub>	EXT "L" Output Current	V <sub>OUT</sub> =4.75V, V <sub>EXT</sub> =4.75V, Test circuits6	1.5			mA
V <sub>CEH</sub>	CE "H" Input Voltage	V <sub>OUT</sub> =4.75V, Test circuits4	1.5			V
V <sub>CEL</sub>	CE "L" Input Voltage	V <sub>OUT</sub> =4.75V, Test circuits4			0.25	V
I <sub>CEH</sub>	CE "H" Input Current	CE=5.0V, Test circuits7		0.0	0.1	μA
I <sub>CEL</sub>	CE "L" Input Current	CE=GND, Test circuits8	-0.1	0.0		μA


# TEST CIRCUIT




Test Circuit 1




Test Circuit 2

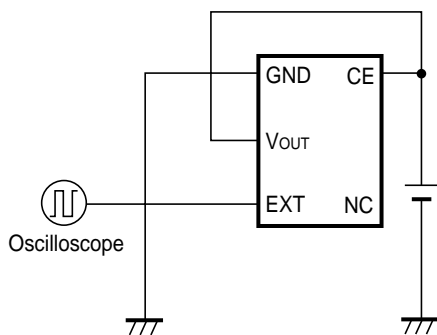


Test Circuit 3

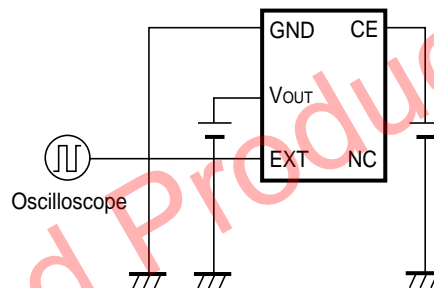


Test Circuit 4

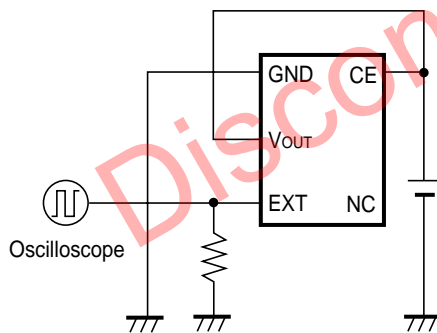


Test Circuit 5

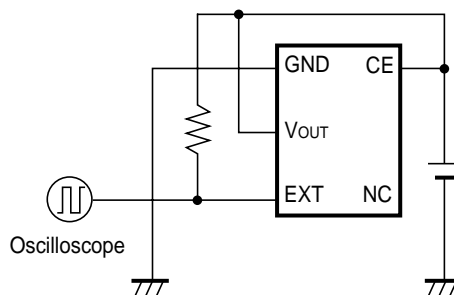

Test Circuit 6

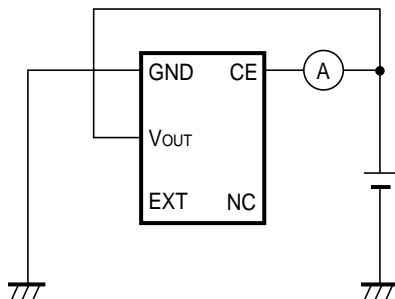

Test Circuit 7









Test Circuit 8









# TYPICAL CHARACTERISTICS




## 1) Output Voltage vs. Output Current

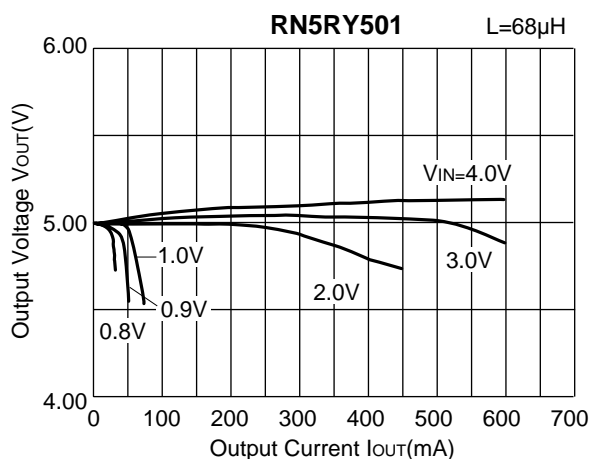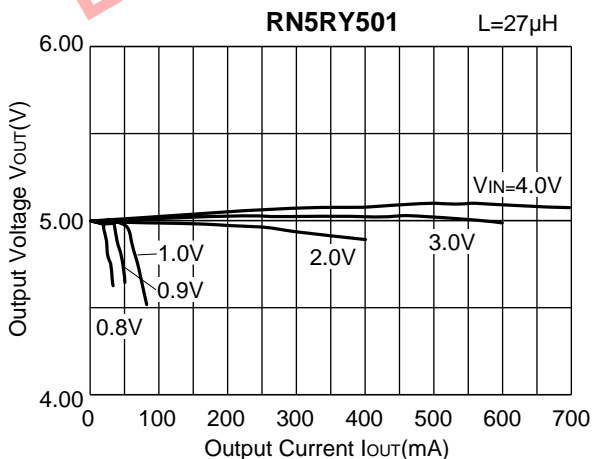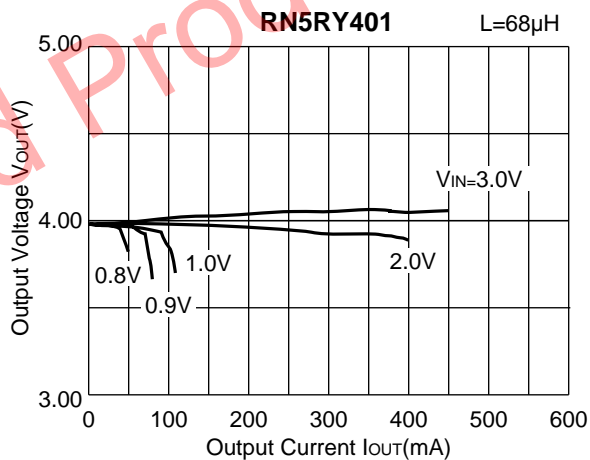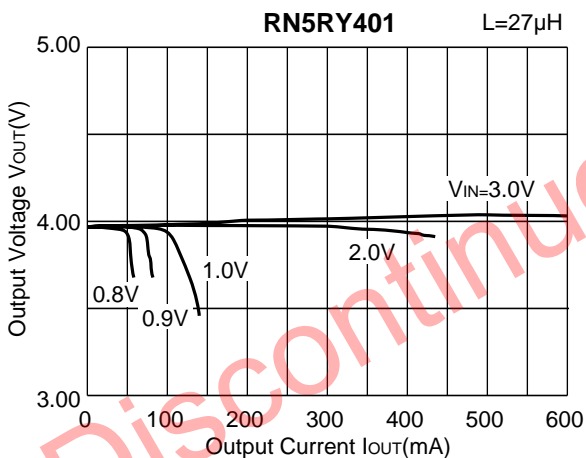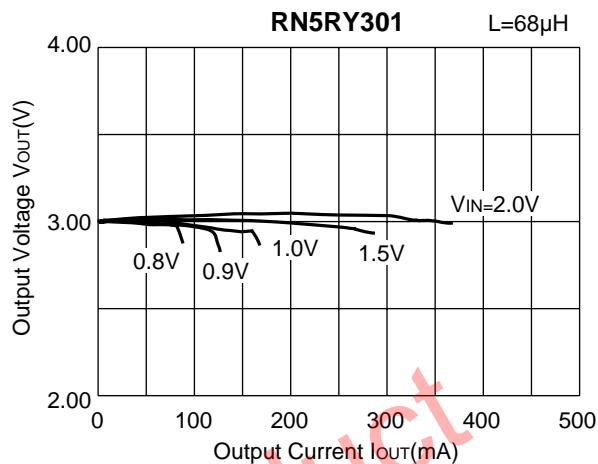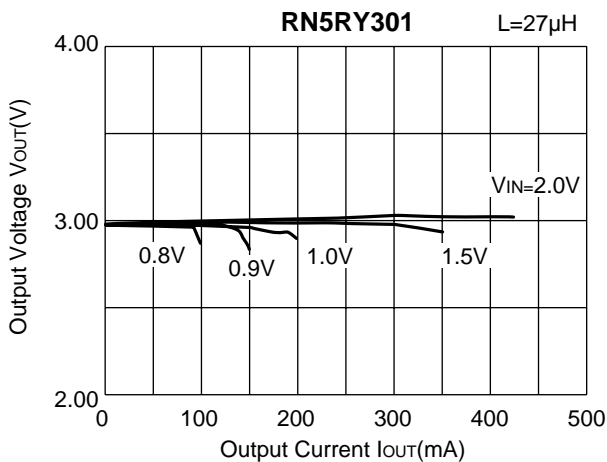

2) Efficiency vs. Output Current

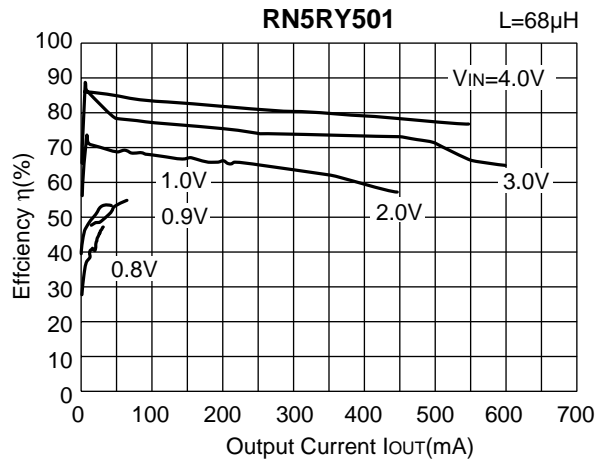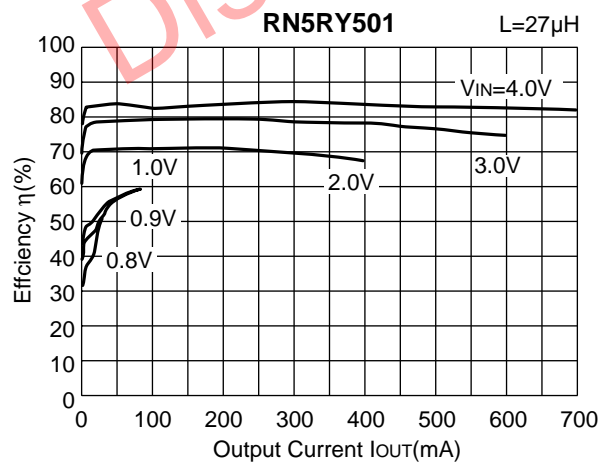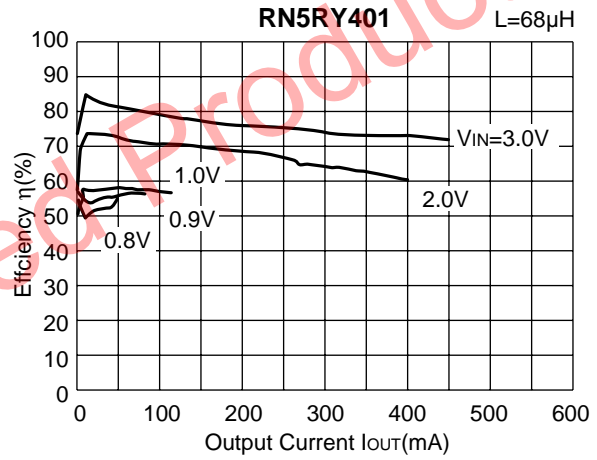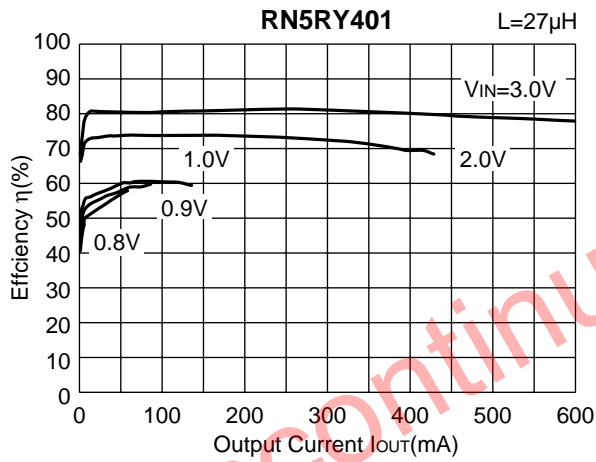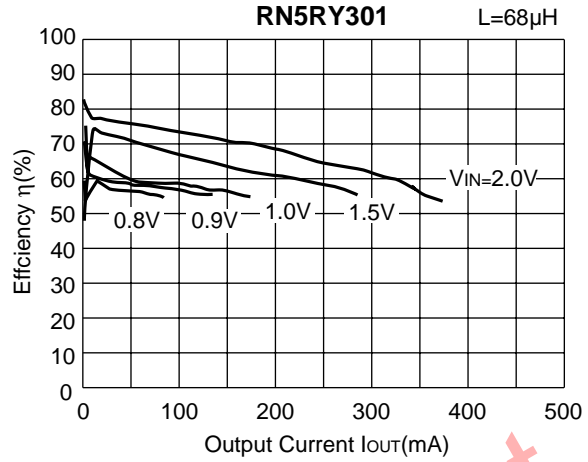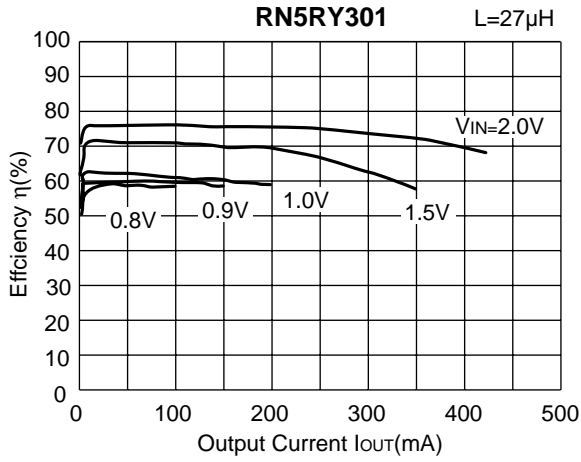


3) Ripple Voltage vs. Output Current

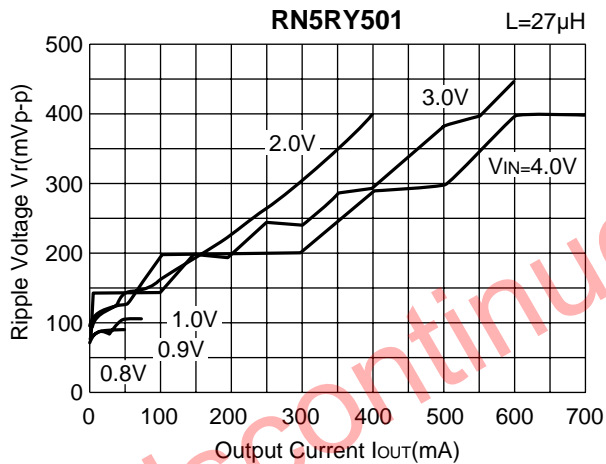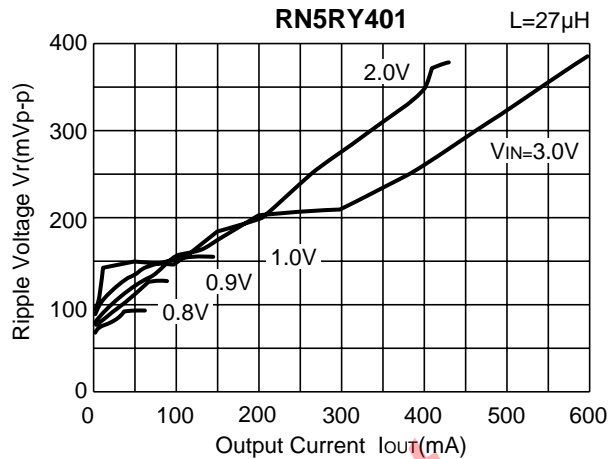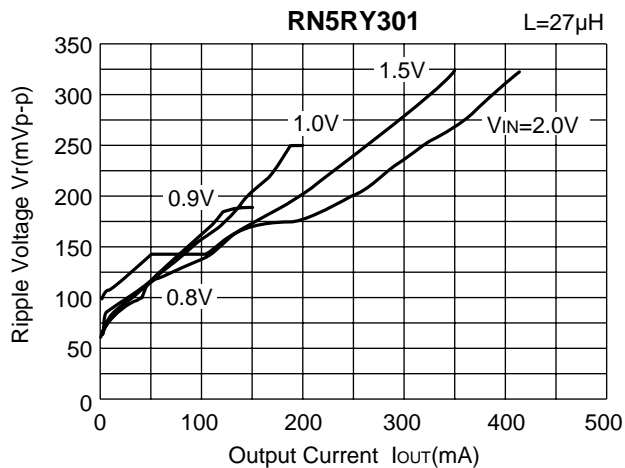

Discontinued Product

## TYPICAL APPLICATIONS

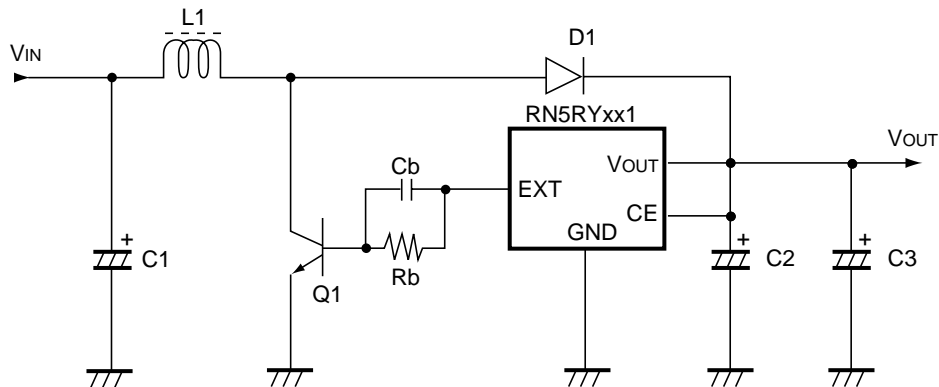

Components : Inductor (L1)	: CD105
Diode (D1)	: D1FS4A (Schottky Type)
Capacitor (C1)	: 33 $\mu$ F (Tantalum Type)
Capacitor (C2)	: 47 $\mu$ F (Tantalum Type)
Capacitor (C3)	: 47 $\mu$ F (Tantalum Type)
Transistor (Q1)	: 2SD1628G
Base Resistor (Rb)	: 220 $\Omega$
Base Capacitor (Cb)	: 2200pF

## APPLICATION HINTS

- A spike-shaped voltage higher than output voltage may be applied to the driver transistor. Therefore, care should be paid regarding its absolute maximum ratings ( $V_{DS}$ ,  $V_{CF}$ ). We recommend to use a transistor having absolute maximum ratings of at least twice the set output voltage.
- We also recommend the use of an output capacitor with an allowable voltage which is at least 1.5 times the set output voltage. This is because there may be the case where a spike-shaped voltage higher than the set output voltage is generated.  
Use capacitor with good high frequency characteristics such as tantalum capacitor.
- Choose such an inductor that a sufficiently small D.C. resistance and large allowable current, and hardly reaches magnetic saturation.
- Use a diode of a Schottky type with high switching speed, and also take care of the rated current.
- Set external components as close as possible to the IC and minimize the current between the components and the IC. In particular, make minimum connection with the output capacitor.
- Make sufficient grounding. A large current flows through GND pin by switching. When the impedance of the GND connection is high, the potential within the IC is varied by the switching current. This may result in unstable operation of the IC.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact Ricoh sales or our distributor before attempting to use AOI.
11. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.**

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

**RICOH** RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

#### Sales & Support Offices

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

##### **Higashi-Shinagawa Office (International Sales)**

3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

##### **RICOH EUROPE (NETHERLANDS) B.V.**

##### **Semiconductor Support Centre**

Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands  
Phone: +31-20-5474-309

##### **RICOH INTERNATIONAL B.V. - German Branch**

##### **Semiconductor Sales and Support Centre**

Oberrather Strasse 6, 40472 Düsseldorf, Germany  
Phone: +49-211-6546-0

##### **RICOH ELECTRONIC DEVICES KOREA CO., LTD.**

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

##### **RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.**

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203, People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

##### **Taipei office**

Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623