

The RN5RF Series are CMOS-based LDO regulators with external power transistor. By using an external PNP transistor, a low dropout voltage regulator ranging from several tens of mA to several hundreds mA can be configured. (Use a low saturation type PNP transistor with h_{FE} of approximately 100 to 300.)


FEATURES

- Supply Current (I_{SS}) Typ. 30 μ A ($V_{IN}=V_{SET}+1.0V$)
- Standby Current ($I_{standby}$) Typ. 0.1 μ A ($V_{IN}=10.0V$, In standby)
- Dropout Voltage (V_{DIF}) Typ. 0.1V* ($I_{OUT}=100mA$, $V_{SET}=2.8V$)
- Ripple Rejection (RR) Typ. 60dB* ($f=1kHz$, $V_{SET} \geq 1.6V$)
Typ. 50dB* ($f=1kHz$, $V_{SET} \leq 1.5V$)
- Input Voltage Range (V_{IN}) 1.8V to 10.0V (Absolute maximum rating: 12.0V)
- Output Voltage Range (V_{OUT}) 1.2V to 6.0V (Internally fixed)
- Output Voltage Accuracy $\pm 2\%$
- Temp. coeff. of Output Voltage Typ. $\pm 100ppm/^{\circ}C$
- Line Regulation Typ. 0.05%/V
- Fold-back Protection Circuit Current limit Typ. 8mA (Base current limit of PNP Tr.)
- Package SOT-23-5


*) The value depends on the capacity of the external PNP transistor.

BLOCK DIAGRAMS

RN5RFxxA
(CE pin "L" active)

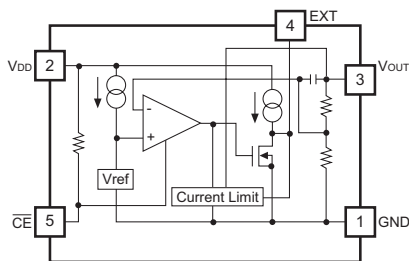

RN5RFxxB
(CE pin "H" active)

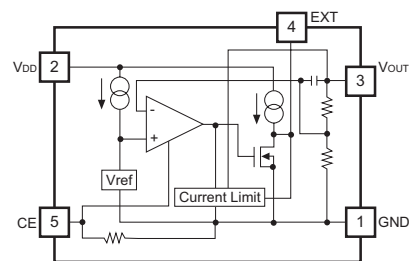


SELECTION GUIDE

Halogen Free	Package	Q'ty per Reel	Part No.
H/F	SOT-23-5	3,000 pcs	RN5RFxx* A-TR-FE

- xx : Specify the output voltage within the range of 1.2V (12) to 6.0V (60) in 0.1V steps.
- * : Select the polarity of the CE pin from (A) "L" active or (B) "H" active.


TYPICAL APPLICATION

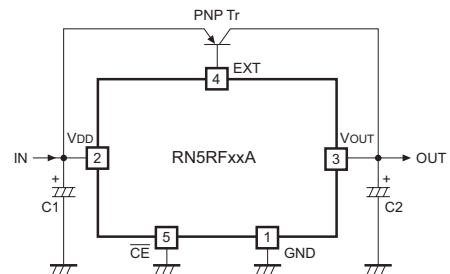

C1, C2 : Tantalum capacitor of 10 μ F
PNP transistor : 2SB766A

PACKAGE (Top View)


SOT-23-5



1	GND
2	V _{DD}
3	V _{OUT}
4	EXT
5	CE or CE

TYPICAL CHARACTERISTIC

RN5RF30A Dropout Voltage vs. Output Current

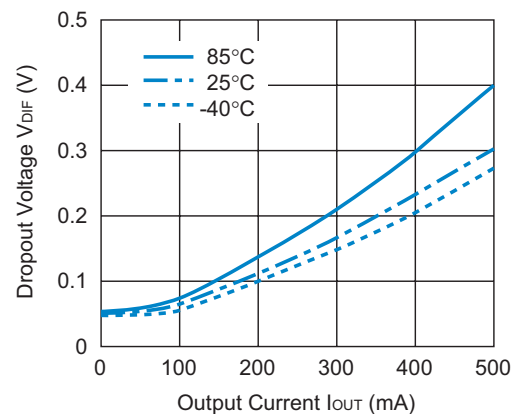

APPLICATIONS

- Power source for hand-held communication equipment, cameras, and VCRs
- Power source for battery-powered equipment
- Power source for home appliances



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg. 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bilbo Road, Pu Dong New District, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623